




100K Series ---Thermal Fuse

Technical Datasheet

Model No.	Tf (°C)	Fuse-Temp (°C)	Current Capability (8×20 μ S)	Tm (°C)	Rated Current (A)	Rated Voltage(V~)	RoHS
100K115	115	111±2	100KA	200	100A	250	▲
100K130	130	121±2	100KA	200	100A	250	▲
100K136	136	131±2	100KA	200	100A	250	▲
100K150	150	145±2	100KA	200	100A	250	▲

Dimension

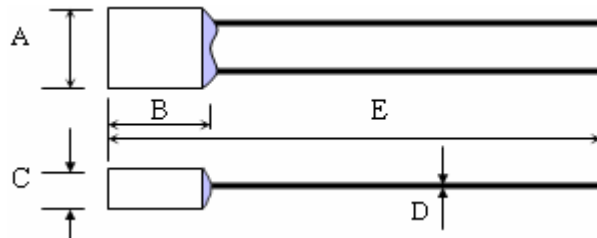

A	B	C	D	E
26.6±2.0mm	29.0±2.0mm	11.0±0.8mm	5.0±0.5mm	60±5mm

Features:

- High surge withstanding ability up to 100kA (8/20 μ s)
- Suitability of automatic soldering process
- No Contact Resistance
- Accuracy of cutoff temperature
- Rapid and reliable fusing action

Applications:

- Protection of MOV
- Transformer
- Lithium Battery
- House Appliance
- Motor
- Capacitor
- Power Surge Strip
- ...

* Xiamen SET Electronics Co., Ltd reserves the right to modify the characteristics published in this leaflet.