


EL or WITHOUT BKL



PIN NO	Symbol	Function
1	VSS	GND
2	VDD	power supply for logic
3	VO	Contrast adjustment
4	RS	H/L Reagister select signal
5	R/W	H/L Read/write signal
6	E	H/L Enable signal
7	DBO	H/L Data bus line
8	DB1	H/L Data bus line
9	DB2	H/L Data bus line
10	DB3	H/L Data bus line
11	DB4	H/L Data bus line
12	DB5	H/L Data bus line
13	DB6	H/L Data bus line
14	DB7	H/L Data bus line
15	A	Power supply for BKL(+)
16	K	Power supply for BKL(-)

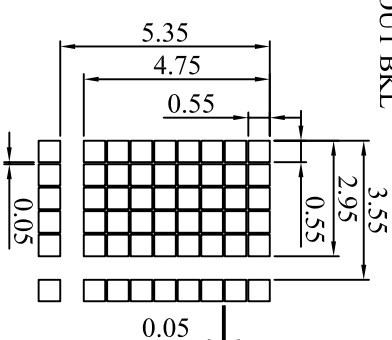

厦门精显电子有限公司
XIAMEN PRECISE DISPLAY CO., LTD.



Customer Approval:

绘图:

绘图编号: PCM2004C

单位: mm

审核:

客户编号:

日期:

批准:

图纸版号:

页数: