



◆ **OUTLINE DIMENSION**

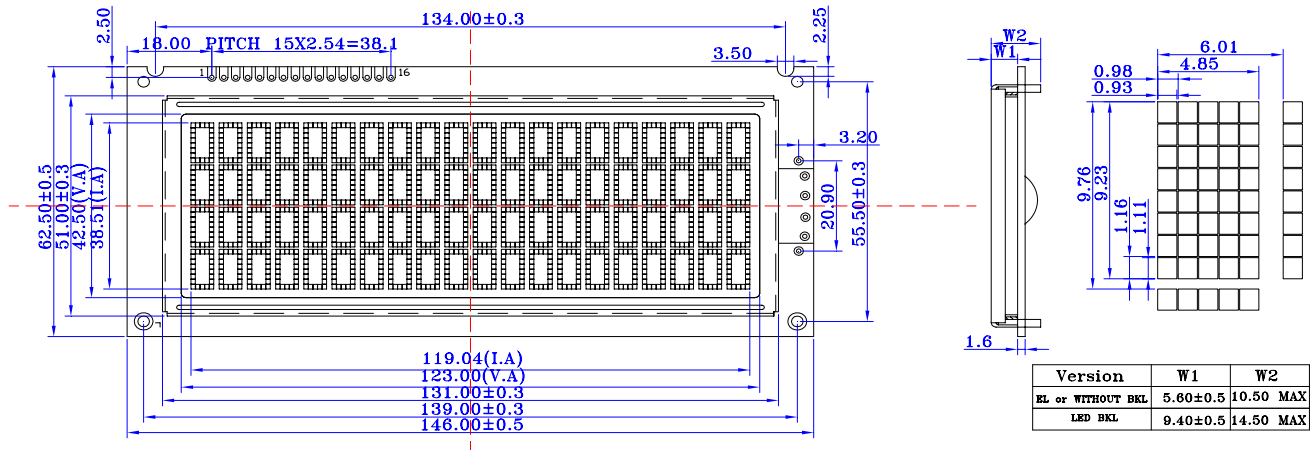

◆ **BLOCK DIAGRAM & POWER SUPPLY**

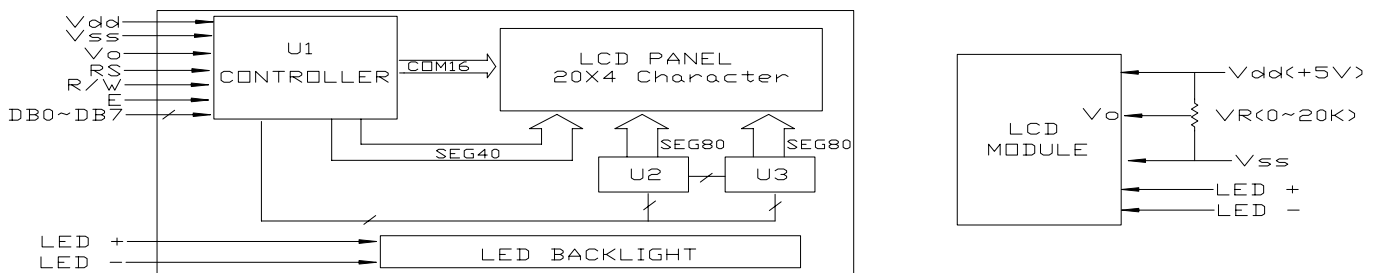

◆ **MECHANICAL SPEC. & FEATURES**

Item	Dimension(mm)	Features	
Module Size(W×H×T)	146.0×62.5×10.5/14.5	LC Fluid	STN (Yellow-green, Gray, Blue), FSTN
Viewing Area(W×H)	123.0×42.5	Polarizer	Reflective, Transflective, Transmissive
Dot Size(W×H)	0.93×1.11	View Angle	6:00 o'clock or 12:00 o'clock
Dot Pitch(W×H)	0.98×1.16	Display Type	Positive or Negative
Character Size(W×H)	4.85×9.23	Backlight	LED (Optional)
Character Pitch(W×H)	6.01×9.76	Operating Temp.	0℃~50℃ or -20℃~70℃
		Controller	S6A0069 or Equivalent

◆ **INTERFACE PIN CONNECTIONS**

Pin No.	Symbol	Function	Pin No.	Symbol	Function
1	Vss	Ground for logic	6	E	Enable signal
2	Vdd	Power supply for logic	7~14	DB0~DB7	Data bus lines
3	Vo	Power supply for LCD	15	A	BKL +
4	RS	Register selection (H:Data, L:Instruction)	16	K	BKL -
5	R/W	Read/Write selection (H: R, L: W)			

◆ **ELECTRICAL CHARACTERISTICS**

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25℃	---	5.0	---	V
Operating Voltage for LCD	Vled	Ta=25℃	---	4.5	---	V
Supply Current	Idd	Ta=25℃, Vdd=5.0V	---	2.0	3.0	mA
Supply Voltage for LED	Vf	Ta=25℃, R=6.8 Ω	---	4.2	---	V
Supply Current for LED	If	Ta=25℃, Vf=4.2V	---	400	---	mA