



◆ **OUTLINE DIMENSION**

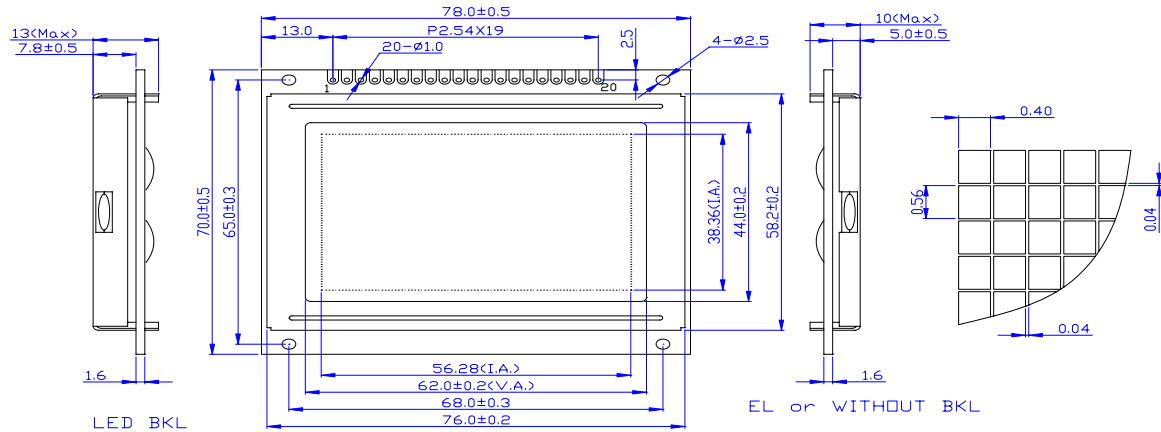

◆ **BLOCK DIAGRAM & POWER SUPPLY**

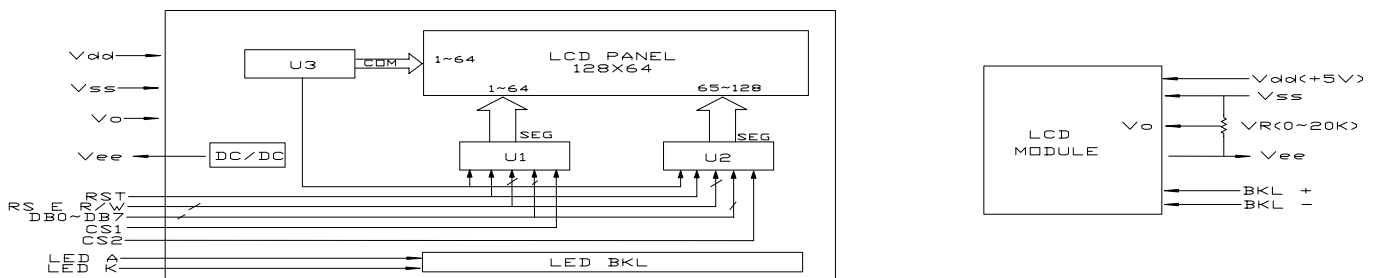

◆ **MECHANICAL SPEC. & FEATURES**

Item	Dimension(mm)	Features	
Module Size(W×H×T)	78.0×70.0×10.0/13.0	LC Fluid	STN (Yellow-green, Gray, Blue), FSTN
Viewing Area(W×H)	62.0×44.0	Polarizer	Reflective, Transflective, Transmissive
Dot Size(W×H)	0.40×0.56	View Angle	6:00 o'clock or 12:00 o'clock
Dot Pitch(W×H)	0.44×0.60	Display Type	Positive or Negative
Dots×Dots	128×64	Backlight	LED (Optional)
		Operating Temp.	0℃~50℃ or -20℃~70℃
		Controller	S6B0108 or Equivalent

◆ **INTERFACE PIN CONNECTIONS**

Pin No.	Symbol	Function	Pin No.	Symbol	Function
1	/CS1	Enable signal for IC1	8	E	Enable signal
2	/CS2	Enable signal for IC2	9~16	DB0~DB7	Data bus lines
3	Vss	Ground for logic	17	RST	Reset signal
4	Vdd	Power supply for logic	18	Vee	Negative voltage output
5	Vo	Power supply for LCD	19	A	BKL +
6	D/I	Register selection (H:Data, L:Instruction)	20	K	BKL -
7	R/W	Read/Write selection (H: R, L: W)			

◆ **ELECTRICAL CHARACTERISTICS**

Item	Symbol	Test Condition	Min.	Typ.	Max.	Unit
Operating Voltage	Vdd	Ta=25℃	---	5.0	---	V
Operating Voltage for LCD	Vlcd	Ta=25℃	---	10.5	---	V
Supply Current	Idd	Ta=25℃, Vdd=5.0V	---	2.5	3.0	mA
Supply Voltage for LED	Vf	Ta=25℃, R=6.8Ω	---	4.2	---	V
Supply Current for LED	If	Ta=25℃, Vf=4.2V	---	300	---	mA