



T Series ---Thermal Fuse

Technical Datasheet


Model No.	Tf (°C)	Fuse-Temp (°C)	Th (°C)	Tm (°C)	Ir (A)	Vr (V)	Surge withstand Capability (8/20 μ s)	CUL	VDE	CCC	RoHS
T102	102	98±2	72	200	15/16	250(AC)	12kA	●	●	●	▲
T115	115	111±2	85	200	15/16	250(AC)	12kA	●	●	●	▲
T136	136	131±2	106	200	15/16	250(AC)	12kA	●	●	●	▲

● Approved ○ Under application ▲ RoHS compliance

Dimension:



Certificate	Standard	File NO.
UL/CUL	UL60691	XCMQ2.E214712
VDE	EN60691,IEC60691	40018082
CCC	GB9816-2008	2009010205346078

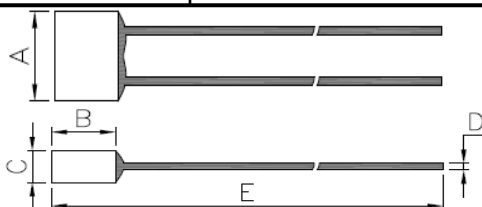

A	B	C	D	E
8.3±0.5mm	7.5±0.5mm	3.4±0.2mm	1.0±0.05mm	45±5mm

Features:

- High surge withstanding ability up to 12kA (8/20 μ s)
- Suitability of automatic soldering process
- No Contact Resistance
- Accuracy of cutoff temperature
- Rapid and reliable fusing action

Applications:

- Protection of MOV
- Transformer
- Lithium Battery
- House Appliance
- Motor
- Capacitor
- Power Surge Strip
- ...

* Xiamen SET Electronics Co., Ltd reserves the right to modify the characteristics published in this leaflet.